



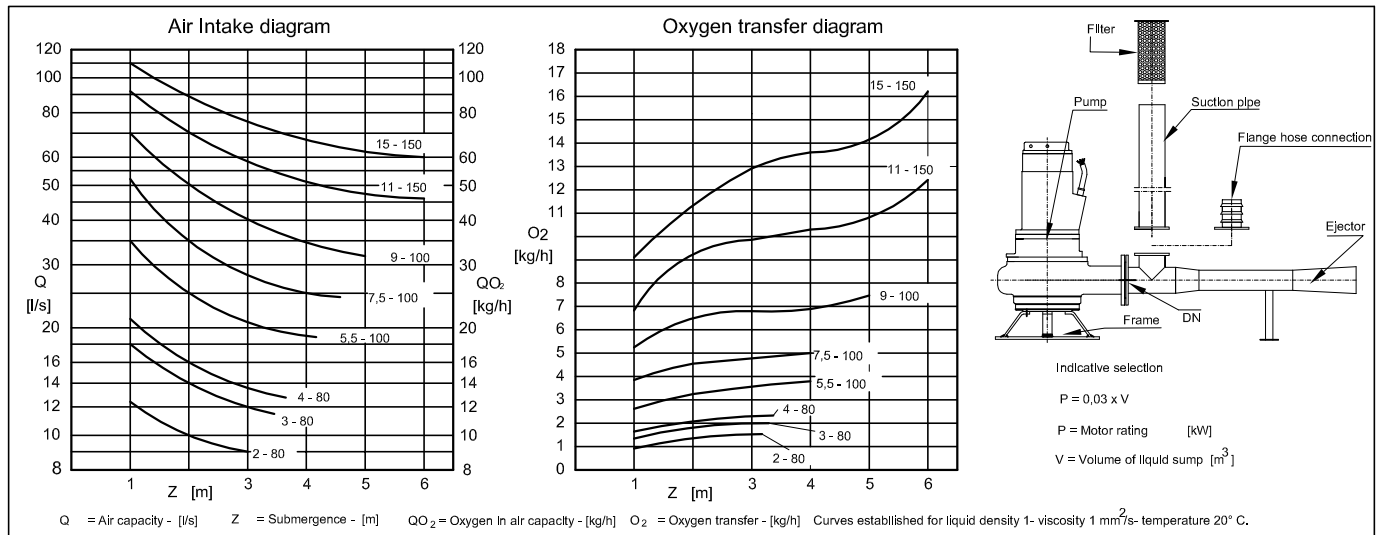

Assembly Pump + Ejector		Composition												
		Electric Pump							Ejector		Accessories			
		Pump Type	Discharge	Motor rating	Windings	Absorption	RPM	Startup		Ejector Type	Suction Pipe	Filter	Hose Connection	Frame
DN	[kW]		[V]	[A (400V)]	n	Direct	Δ - Δ							
FJET 2 - 80		80.2.2-4/212	80	2,2	230-400	5,4	1450	Δ		80 - 55	S 80	F 80	HC 80	FR 80
FJET 3 - 80		80.3.5-4/218		3,5		6,6	1450	Δ						
FJET 4 - 80		80.4.2-4/228		4,2		9,9	1450	Δ	Δ - Δ					
FJET 5,5 - 100		100.5-4/230	100	5	400-690	11	1450	Δ	Δ - Δ	100 - 63	S 100	F 100	HC 100	FR 100
FJET 7,5 - 100		100.7.5-4/246		7,5		16	1450	Δ	Δ - Δ					
FJET 9 - 100		100.9-4/263		9		20	1450	Δ	Δ - Δ					
FJET 11 - 150		150.12-4/280	150	11		24	1450	Δ	Δ - Δ	150 - 95	S 150	F 150	HC 150	FR 150
FJET 15 - 150		150.14-4/298		14		30	1450	Δ	Δ - Δ					

OVERALL DIMENSIONS [mm]															ACCESSORIES					
															Frame	Hoist & Winch	Hose Connection with Flange	Suction pipe	Air Intake Filter	
Aerator Type	DN1	DN2	A	B	C	D	E	F	G	H	I	L	M	N						
FJET 2 - 80	80	80	240	630	390	88,9	200	360	632	420	118	1016	240	360	FR 80	HW 80	HCF 80	S 80	AIF 80	
FJET 3 - 80				670	430					460			280							
FJET 4 - 80				800	413															
FJET 5,5 - 100	100	100	240	806	566	114	260	421	632	460	118	1016	280	360	FR 100	HW 100	HCF 100	S 100	AIF 100	
FJET 7,5 - 100				826	586					525			345							457
FJET 9 - 100				945	603															
FJET 11 - 150	150	150	342	1019	677	168	395	491	943	516	202	1592	370	468	FR 150	HW 150	HCF 150	S 150	AIF 150	
FJET 15 - 150																				

